




Release Unit D30 H8  
Notes on Use and Installation

## Safety instructions

The data and information in the instructions are intended solely for product description and assembly. The information does not release the user from his own assessments and tests.




It should be noted that the mechanically loaded components are subject to a natural wear and ageing process. Check all components for obvious defects before assembly.

## Product

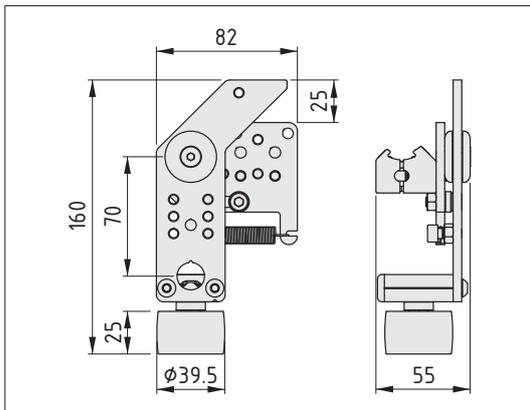

- 1 Release Unit D30
- 1 Multiblock D30 half M6 K, die-cast aluminium, natural
- 1 Multiblock D30 half M6 G, die-cast aluminium, natural
- 2 Hexagon Socket Head Cap Screws DIN 912-M6x35, St, bright zinc-plated


## Options

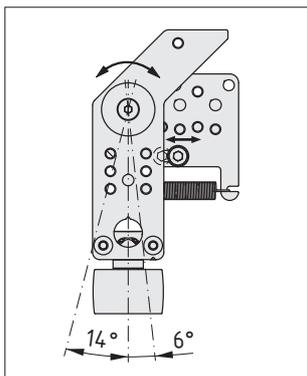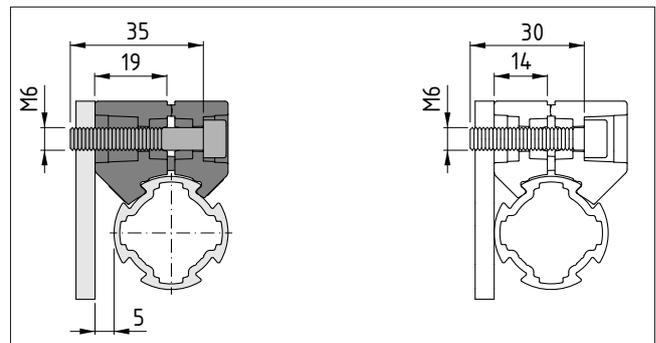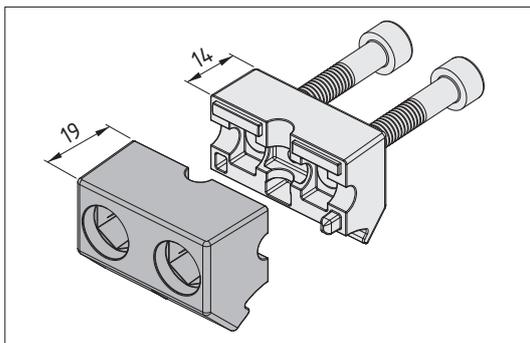


The Release Unit-Latch is adjustable in a swivel range of approx. 20°.

All screws used M6 have a key width SW5  
The recommended tightening torque: M = 10Nm


Variant - Roller Conveyor St D30 - Fixation with Adapter 6 D30 and T-Slot Nut 6

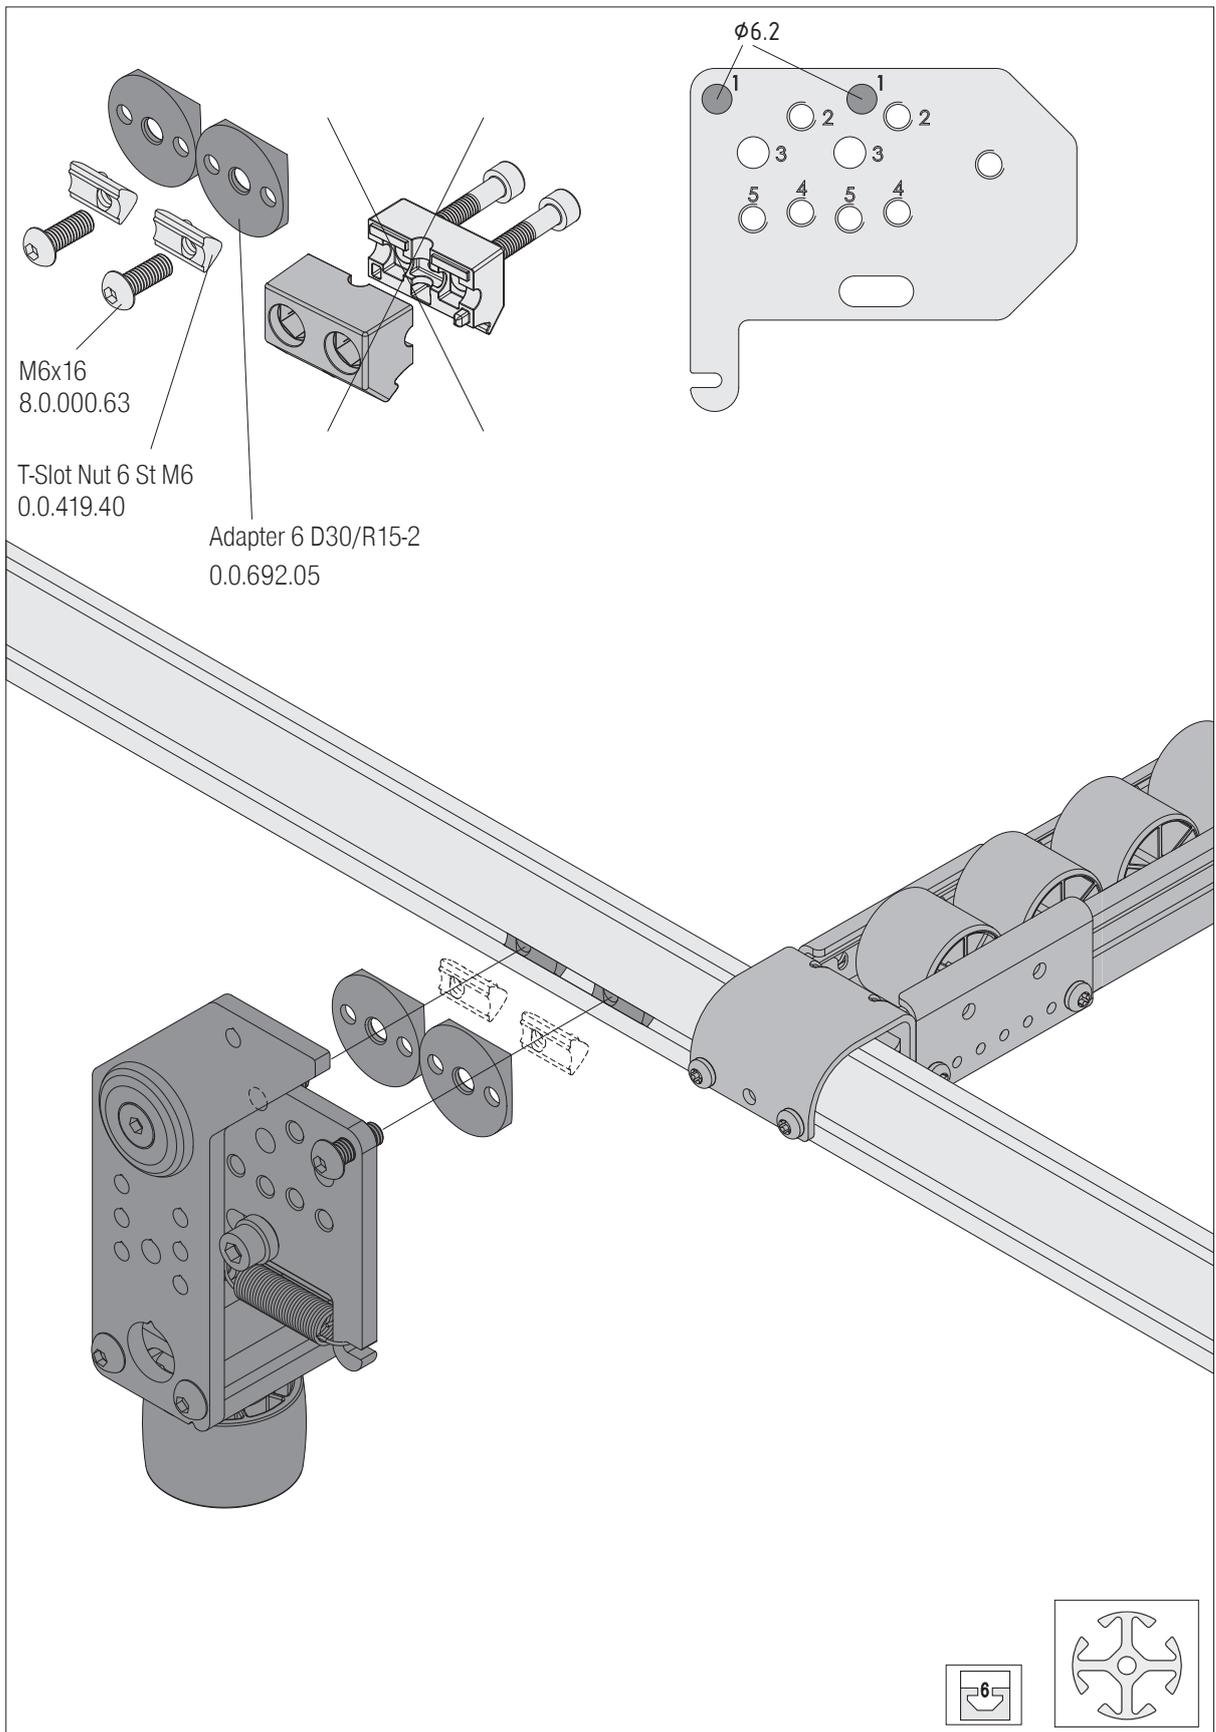


Variant - Roller Conveyor St D30 - Fixation with Multiblock D30, Mounting position top

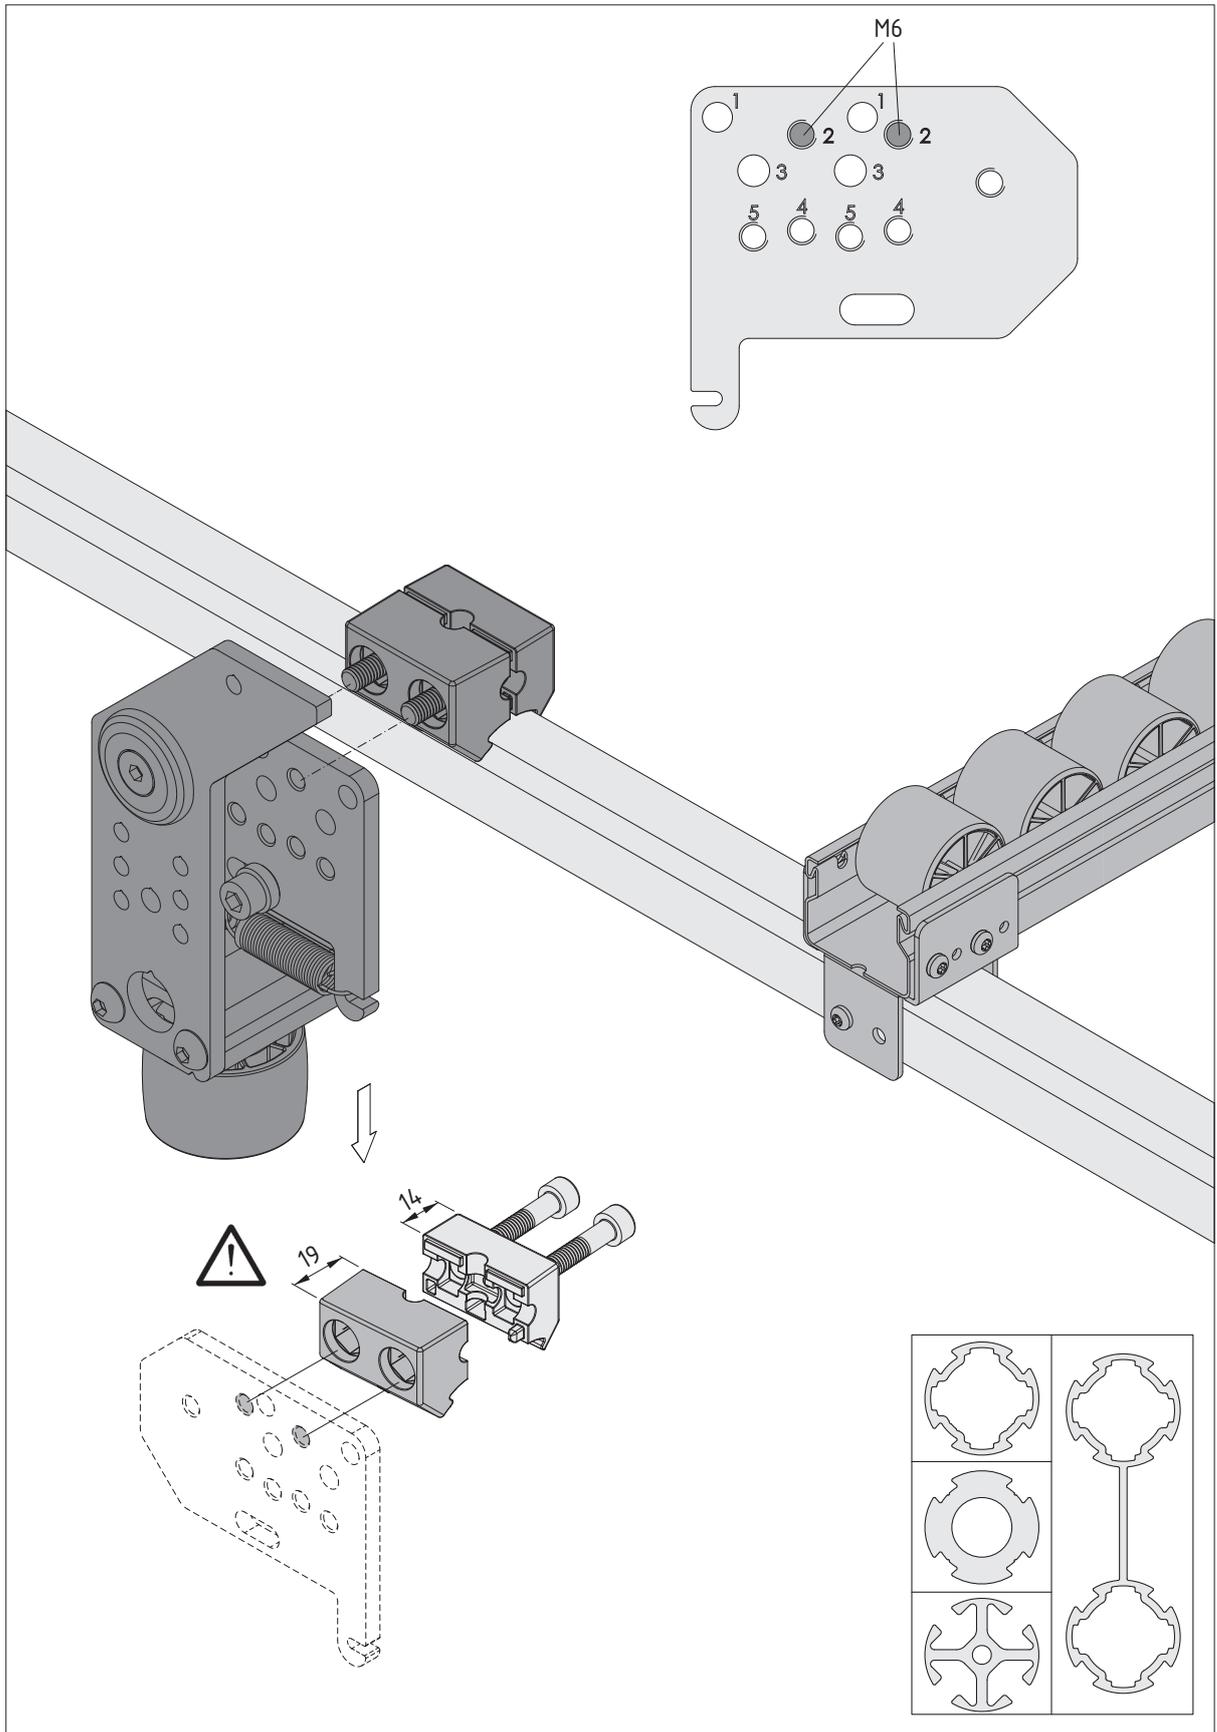


Variant - Roller Conveyor St D30 - Fixation with Multiblock D30, Mounting position below

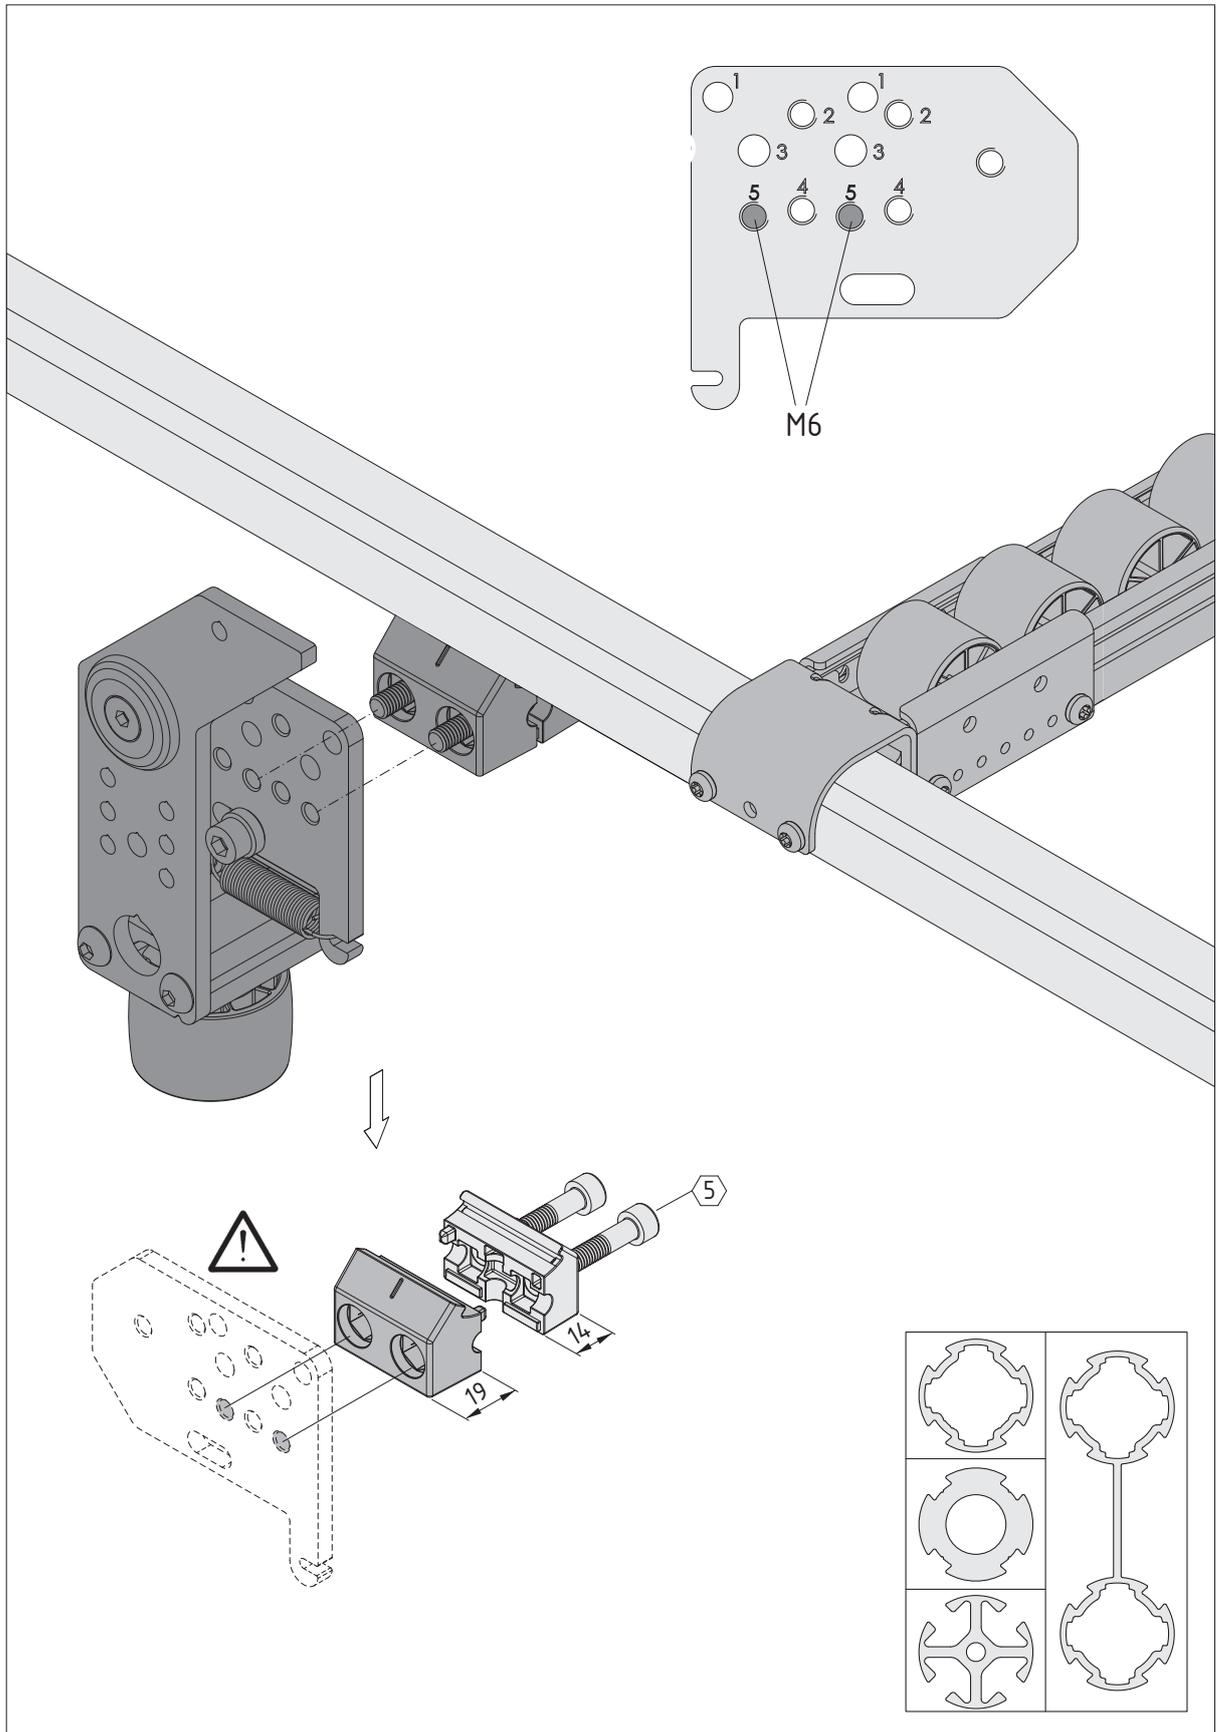

### Variant - Roller Conveyor 6 D30 - Fixation with T-Slot Nut 6

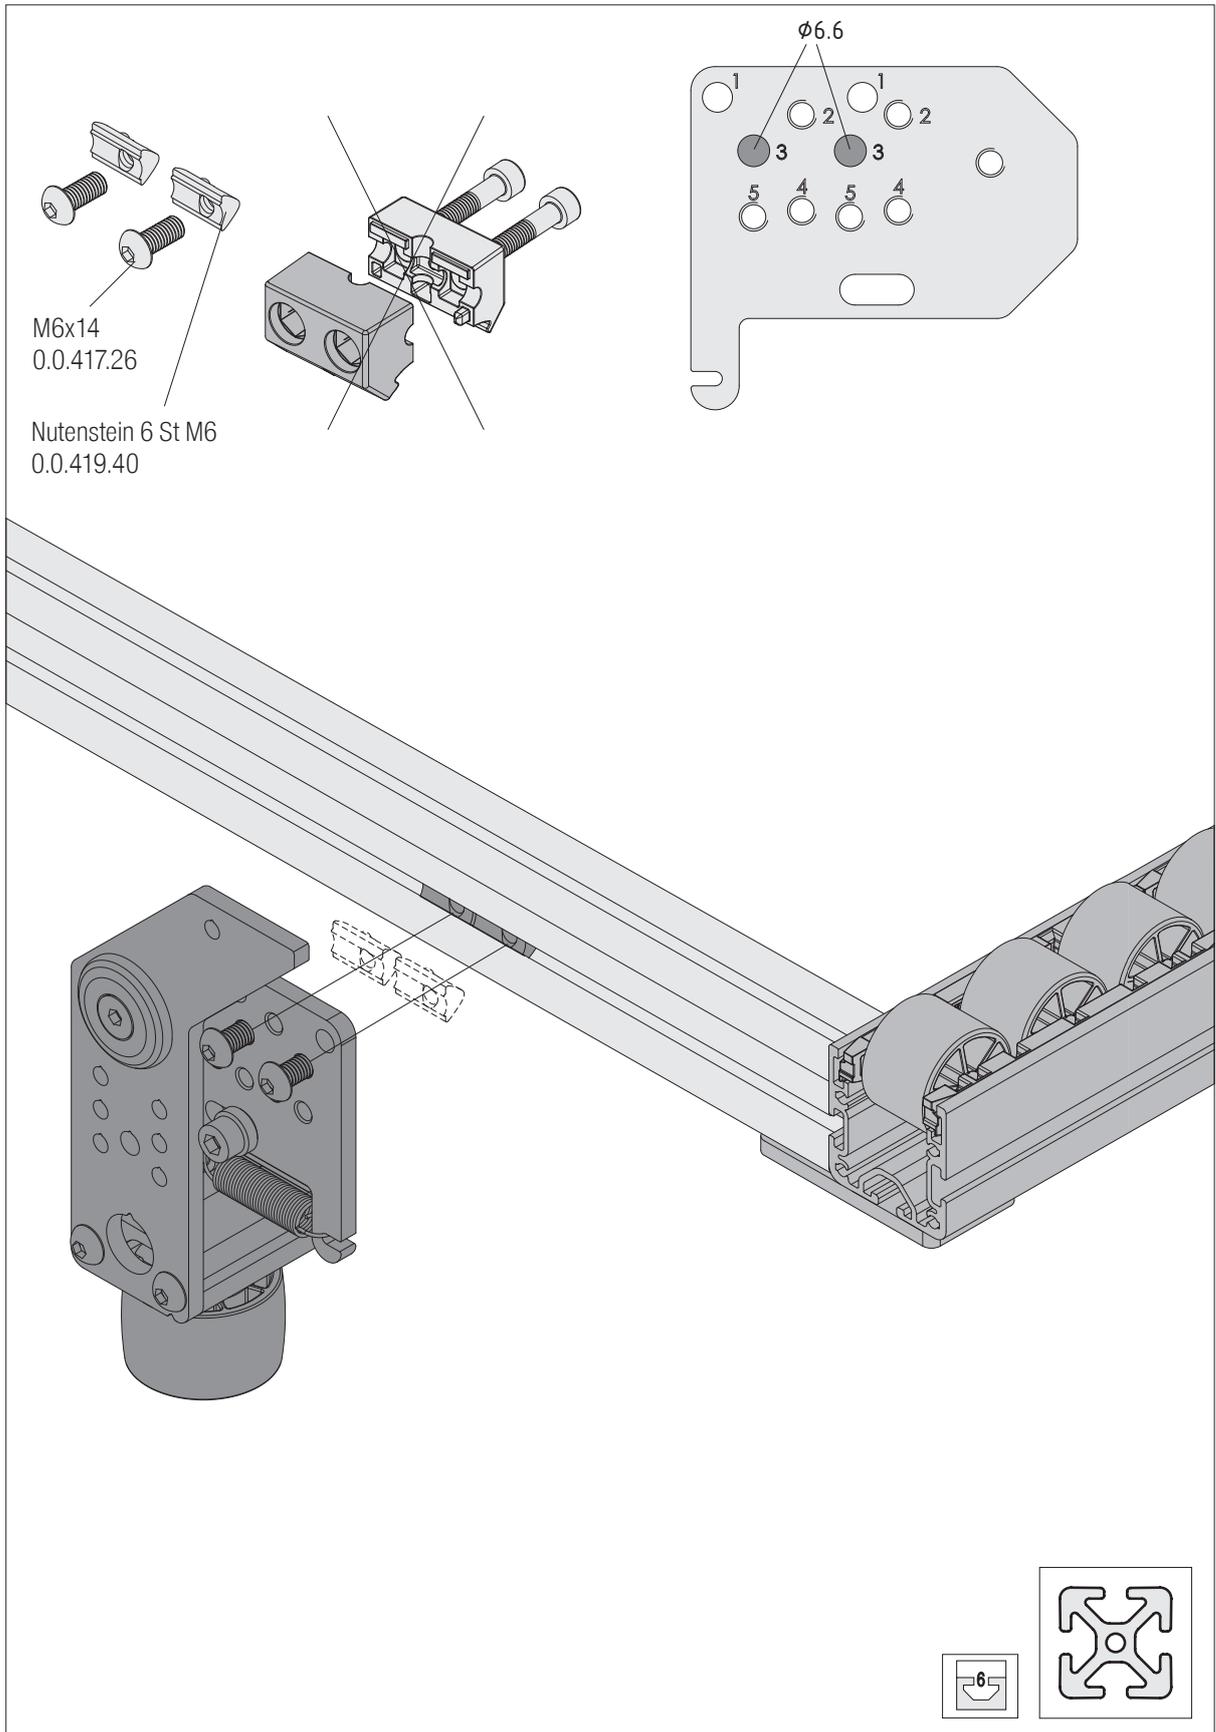

Variant - Transport Roller D30 - Fixation with Multiblock D30, Mounting position below

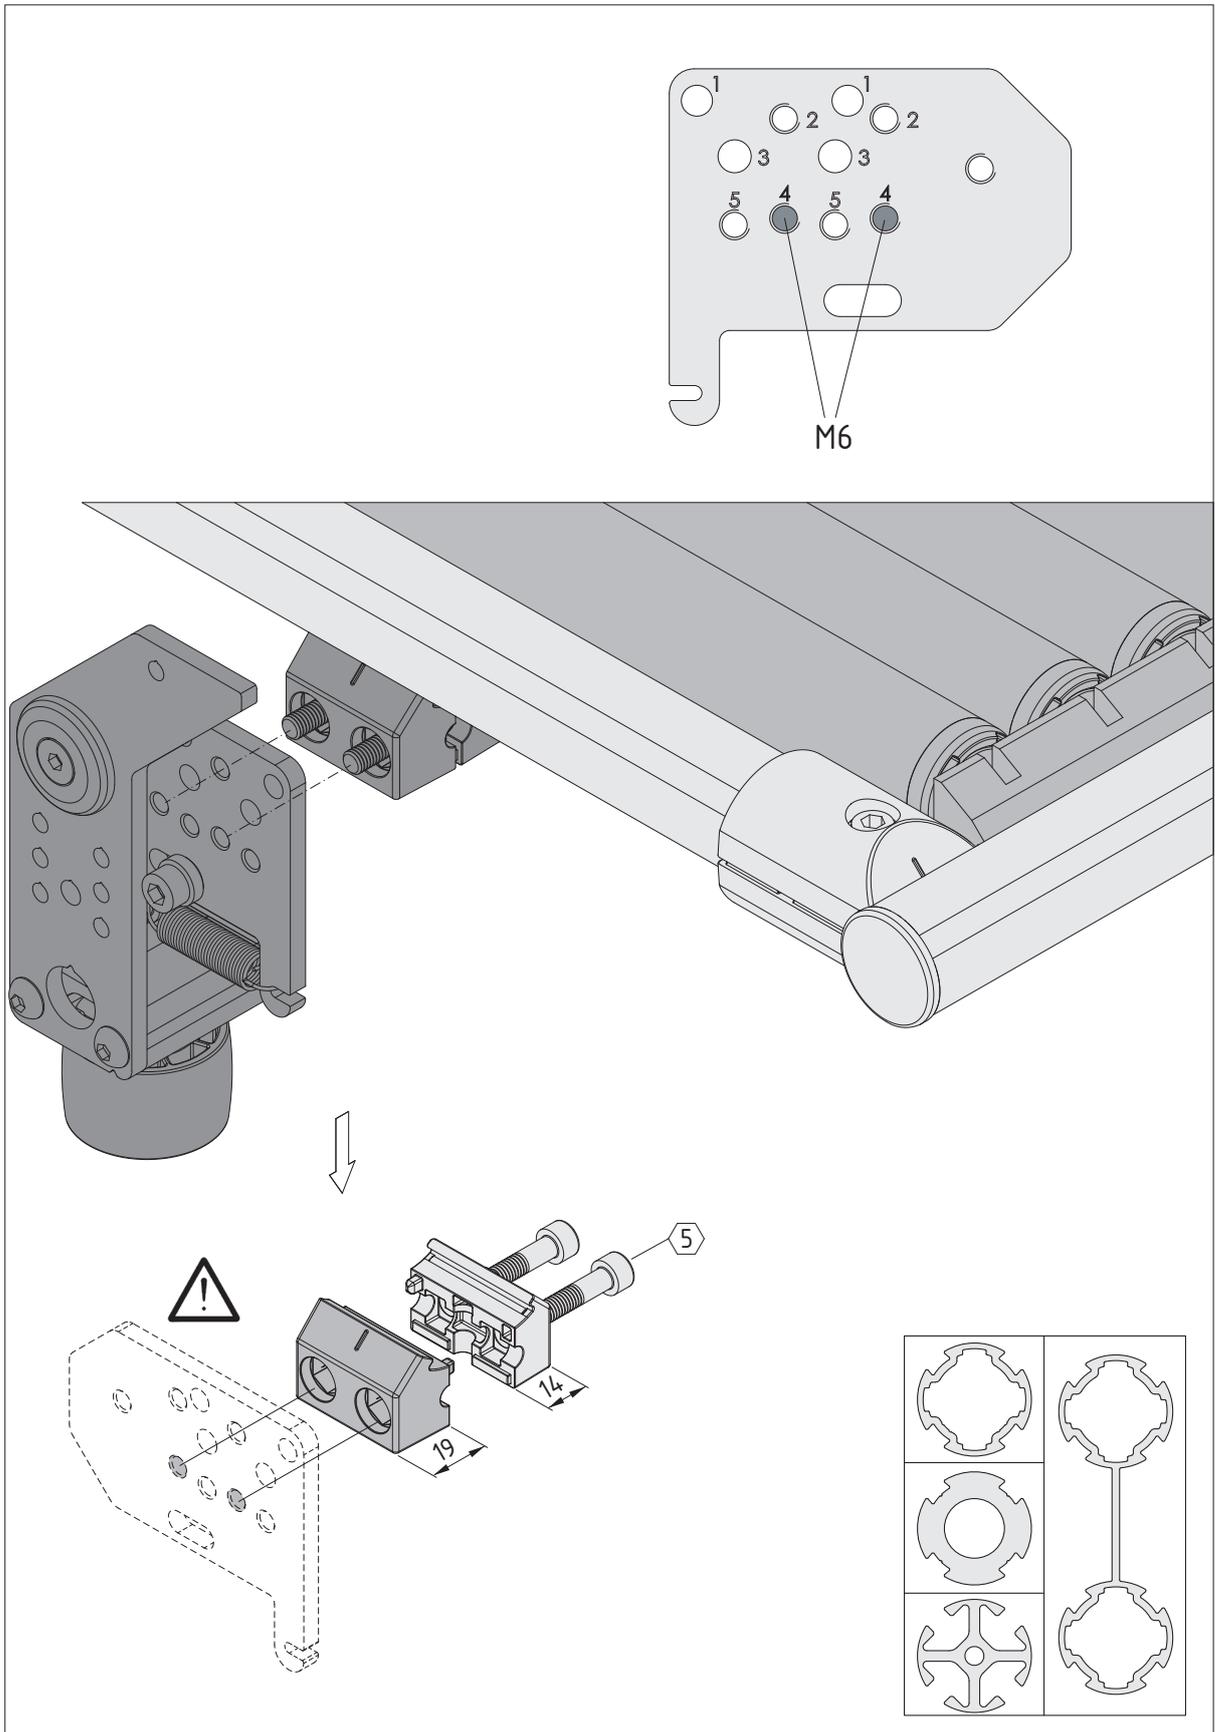

**item**

item Industrietechnik GmbH  
Friedenstraße 107-109  
42699 Solingen  
Deutschland  
Fon +49 212 6580 0  
info@item24.com  
item24.com

07/2023

Made in Germany

item Industrietechnik GmbH

0.0.722.02