


Knuckle Foot D80, M16x160, black

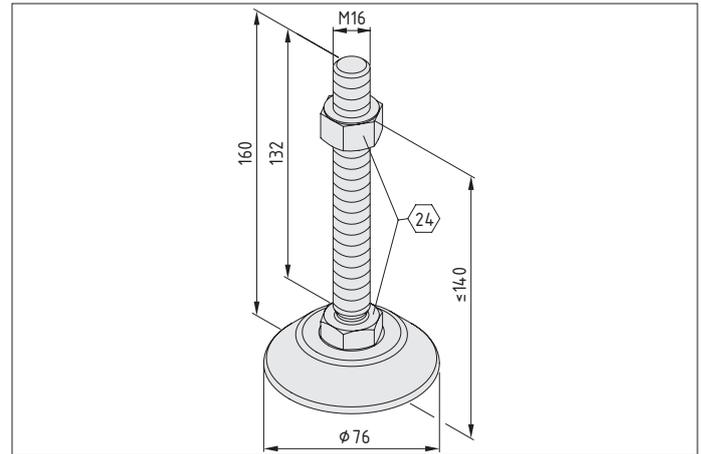

✓ REACH ✓ RoHS

The infinitely adjustable feet are suitable for structures of all kinds. Depending on the particular application, the adjustable feet can be fitted in the core bores of profiles or used in combination with Base Plates / Transport Plates. The range of applications can be extended by appropriate inserts and foot clamps. The minimum foot height is obtained by removing the counter nut.

Scope of Delivery

Spindle, St, bright zinc-plated
 Foot plate, die-cast zinc, black
 Hexagon nut DIN 934 M16-I8I, St, bright zinc-plated

Technical note

[0.0.265.66](#) For more information, please click here!

Properties	
Article number	0.0.265.66
Colour	black
Delivery unit	1 pce.
Weight	450.0 g
Force max	10000 N

Accessoires

0.0.265.30	Foot Clamp D80, black
0.0.265.61	Rubber Insert D80, black
0.0.458.93	Anti-Vibration Insert D80, stainless