
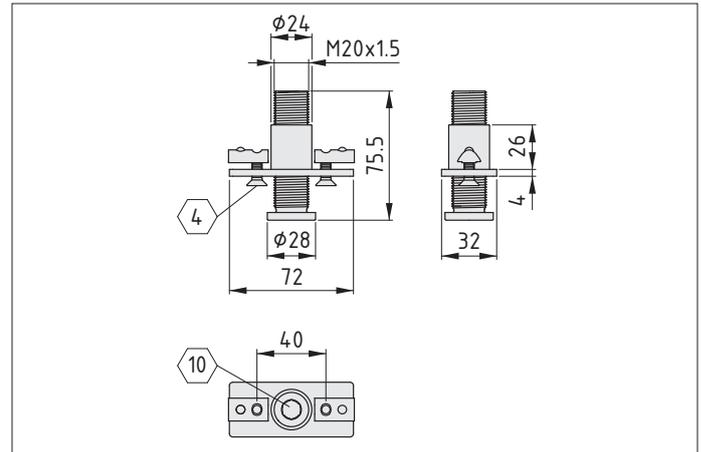


# Adjustable Foot 8 M20x40

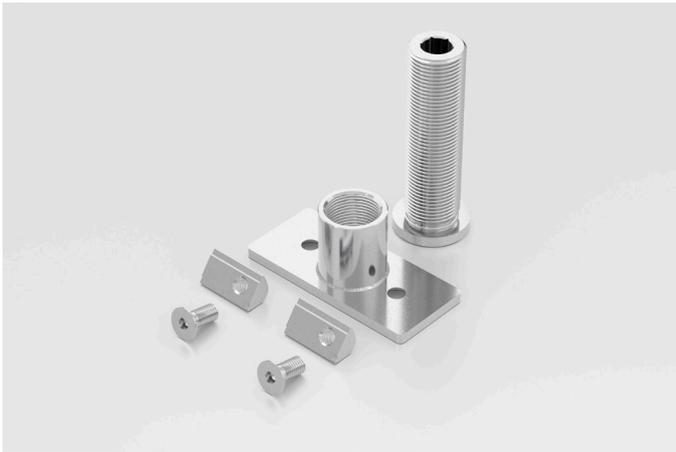

Adjustable Foot 8 M20x40 is extremely strong and features a 40 mm stepless height adjustment mechanism. Its integrated flange can be used to fasten it to a Line 8 groove. To fasten the product in this way, a through hole needs to be drilled through the profile, which itself must be at least 80 mm tall. Screw Anchor ST 8x130 (0.0.720.66) is used to create the floor fixing.

### Scope of Delivery

- 2 T-Slot Nuts V 8 St M6, bright zinc-plated
- 2 Countersunk Screws DIN 7991 M6x14
- 1 flange for Adjustable Foot 8 M20x40
- 1 spindle for Adjustable Foot 8 M20x40

### Technical note

[0.0.719.15](#) Please click here for further information!

Properties	
Article number	0.0.719.15
Delivery unit	1 set
Status on delivery	Preassembled
Weight	265.0 g

Accessoires	
<a href="#">0.0.720.66</a>	Screw Anchor ST 8x130, bright zinc-plated
<a href="#">0.0.719.93</a>	Profile X 8 120x40 4N0180 light, natural
<a href="#">0.0.719.94</a>	Profile X 8 120x80 4N0180 light, natural
<a href="#">0.0.432.80</a>	Step Drill with tapered countersink, Universal Connection 8
<a href="#">0.0.480.35</a>	Ball-Headed Key 10 A/F
<a href="#">0.0.406.39</a>	Key with T-Handle 4 A/F