
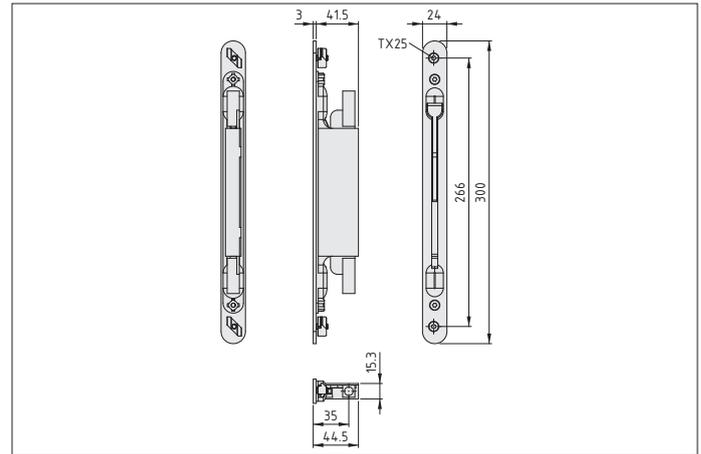


# Flush Bolt 40

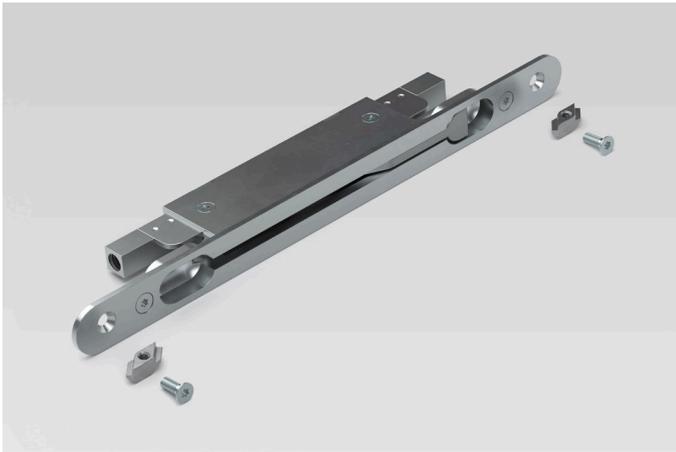

Flush Bolt 40 from item is used to lock and unlock the inactive leaf of an item Double Access Door.  
Flipping the toggle lever moves two Round Bars D10 M10 (0.0.728.94) inside Door Profile 8 80x40 (0.0.727.36). These round bars hold the inactive door leaf securely closed by engaging with Flush Bolt 40, Strike Plate (0.0.728.91) at the top and Floor Strike D40 D11 (0.0.729.78) at the bottom.

### Scope of Delivery

- 1 flush bolt without face plate
- 1 face plate for flush bolt
- 2 T-Slot Nuts 8 Zn M5
- 2 Countersunk Screws ISO 14581-M5x14 TX25, stainless

### Technical note

[0.0.728.27](#) Please click here for further information!

Properties	
Article number	0.0.728.27
Delivery unit	1 set
Weight	565.0 g

Accessoires	
<a href="#">0.0.729.78</a>	Floor Strike D40 D11
<a href="#">0.0.728.91</a>	Flush Bolt 40, Strike Plate
<a href="#">0.0.728.94</a>	Round Bar D10 M10 -1500
<a href="#">0.0.727.54</a>	Door Profile Cap Set 8, Inactive Leaf
<a href="#">0.0.727.48</a>	Door Profile 8 80x40, natural