



Quick Coupler 8, Release Unit 40x28

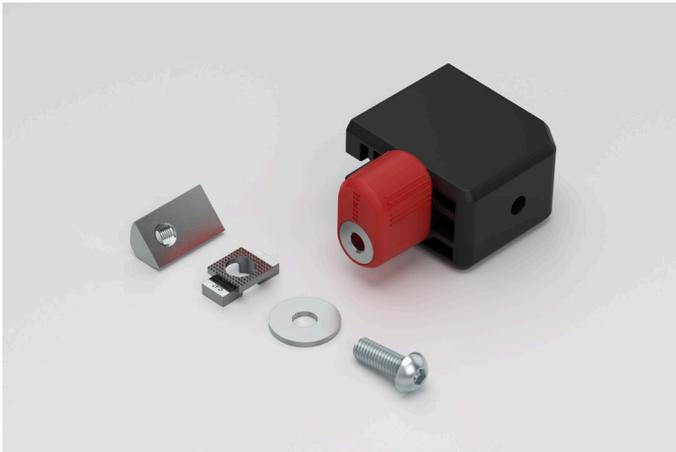

Quick Coupler 8, Release Unit 40x28 is one of the system components of item Quick Coupler 8 (0.0.731.92), which helps position mobile solutions correctly in relation to profile frames or work benches and hold them in place.

The stainless steel pin of the release unit engages with Quick Coupler 8, Receiver 40x28 (0.0.730.06). This spring-loaded pin can be disengaged either by actuating the manual lever or via a Bowden cable in order to release the mobile unit.

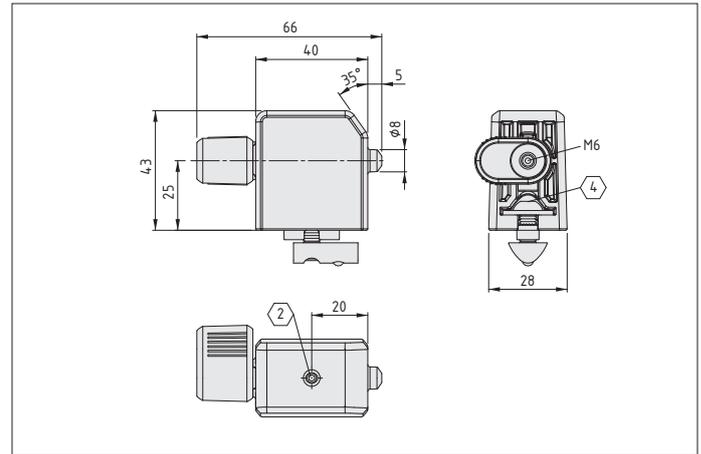

Scope of Delivery

- 1 Quick Coupler 8, Release Unit 40x28, PA-GB, black with stainless steel bolt
- 1 T-Slot Nut 8 St M6, bright zinc-plated
- 1 Button-Head Screw ISO 7380-M6x18, St, bright zinc-plated
- 1 Washer ISO 7093-1-6-200 HV, St, bright zinc-plated
- 1 locating lug, die-cast zinc, bright zinc-plated

Technical note

[0.0.730.05](#) Please click here for further information!

Properties	
Article number	0.0.730.05
Delivery unit	1 set
Weight	97.0 g

Accessoires	
0.0.723.61	Guide Wedge 8 40x40 30°, Double-Sided
0.0.723.62	Guide Wedge 8 40x40 30°, Single-Sided
0.0.730.06	Quick Coupler 8, Receiver 40x28
0.0.682.53	Bowden Cable D1.5
0.0.682.45	End Cap D6/D5-12
0.0.691.93	Manual Trigger D30
0.0.692.48	Cable Barrel Clamp D7/D2-7 M4
0.0.682.42	Adjusting Screw D5/D3-M6x20
0.0.473.78	Ball-Headed Key 2 A/F