


Quick Coupler 8, Receiver 40x28

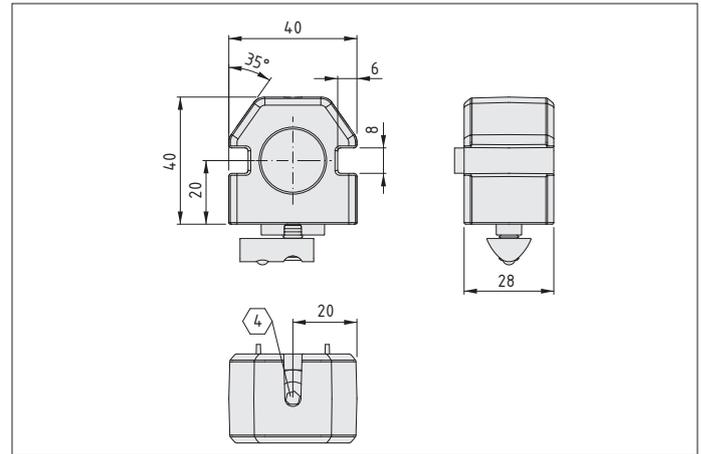

Quick Coupler 8, Receiver 40x28 is one of the system components of item Quick Coupler 8 (0.0.731.92), which helps position mobile solutions correctly in relation to profile frames or work benches and hold them in place.

The stainless steel pin of Quick Coupler 8, Release Unit 40x28 (0.0.730.05) engages with the receiver. This spring-loaded pin can be disengaged either by actuating the manual lever or via a Bowden cable in order to release the mobile unit.

Scope of Delivery

- 1 Quick Coupler 8, Receiver 40x28, PA-GB, black
- 1 Cap 8 D20 NO, PA, black
- 1 T-Slot Nut 8 St M6, bright zinc-plated
- 1 Button-Head Screw ISO 7380-M6x18, St, bright zinc-plated
- 1 Washer ISO 7093-1-6-200 HV, St, bright zinc-plated
- 1 locating lug, die-cast zinc, bright zinc-plated

Technical note

[0.0.730.06](#) Please click here for further information!

Properties	
Article number	0.0.730.06
Delivery unit	1 set
Weight	53.0 g

Accessoires	
0.0.730.05	Quick Coupler 8, Release Unit 40x28
0.0.406.60	Ball-Headed Key 4 A/F
0.0.406.39	Key with T-Handle 4 A/F