


# Quick Coupler 8

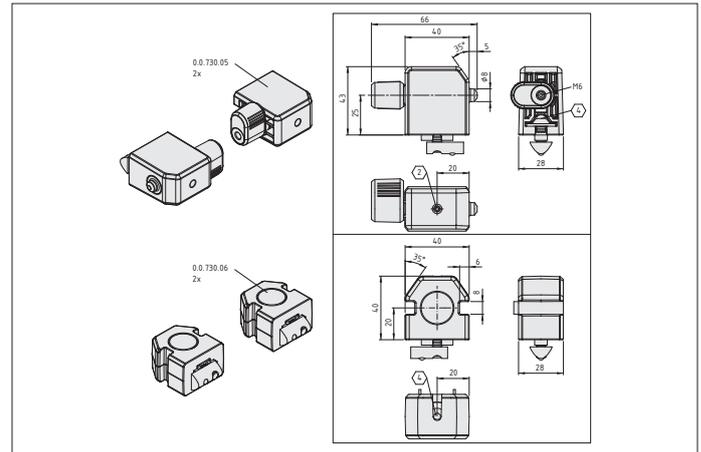

item Quick Coupler 8 ensures that a mobile solution is correctly positioned by temporarily connecting it to a profile frame or work bench. This connection is made when the Quick Coupler's compact release unit engages with the receiver. To allow the mobile solution to move off again, the spring-loaded stainless steel pin of the release unit has to be disengaged via the manual lever or a Bowden cable.

Quick Coupler 8 contains two release units and two receivers. Quick Coupler 8, Release Unit 40x28 (0.0.730.05) and Quick Coupler 8, Receiver 40x28 (0.0.730.06) are also available separately so that one transport trolley can be utilised at several different positions, for example.

### Scope of Delivery

- 2 Quick Coupler 8, Release Units 40x28, PA-GB, black with stainless steel bolts
- 2 Quick Coupler 8, Receivers 40x28, PA-GB, black

### Technical note

[0.0.731.92](#) Please click here for further information!

Properties	
Article number	0.0.731.92
Delivery unit	1 set
Weight	296.0 g

Accessoires	
<a href="#">0.0.723.61</a>	Guide Wedge 8 40x40 30°, Double-Sided
<a href="#">0.0.723.62</a>	Guide Wedge 8 40x40 30°, Single-Sided
<a href="#">0.0.730.05</a>	Quick Coupler 8, Release Unit 40x28
<a href="#">0.0.730.06</a>	Quick Coupler 8, Receiver 40x28
<a href="#">0.0.682.53</a>	Bowden Cable D1.5
<a href="#">0.0.682.45</a>	End Cap D6/D5-12
<a href="#">0.0.691.93</a>	Manual Trigger D30
<a href="#">0.0.692.48</a>	Cable Barrel Clamp D7/D2-7 M4
<a href="#">0.0.473.78</a>	Ball-Headed Key 2 A/F
<a href="#">0.0.406.60</a>	Ball-Headed Key 4 A/F
<a href="#">0.0.406.39</a>	Key with T-Handle 4 A/F